

SAFELIGHT POWERLED

SF-POWER 2700-2 / SF-POWER 2700-1



Garanti: VRLA Akü ile 2 yıl, LiFePO4 Pil ile 5 yıl
(**Warranty:** 2 years with VRLA Battery, 5 years with LiFePO4 Battery)

Dayanıklı Metal Kasa, Led Işık Kaynağı
(Durable Metal Housing, LED Light Source)

ACİL AYDINLATMA ARMATÜRÜ/
EMERGENCY LIGHTING FIXTURE




Safelight Power, dayanıklı metal gövdesi, VRLA Akü / LiFePO₄ batarya seçenekleri, yüksek ışık gücü ve Class I elektrik güvenliği ile zorlu koşullarda uzun süreli, güçlü ve güvenilir acil aydınlatma performansı sunar. ABS plastik far yapısı darbelere karşı dayanıklılık sağlarken, kompakt tasarımı ile endüstriyel alanlar için ideal bir çözümdür.

EN: (Safelight Power delivers long-lasting, powerful, and reliable emergency lighting performance in demanding environments with its durable metal housing, VRLA battery / LiFePO₄ options, high light output, and Class I electrical safety. The ABS plastic lamp structure provides enhanced impact resistance, while its compact design makes it an ideal solution for industrial applications.)




Özellik	Değer / Açıklama
Gövde	Metal Kasa
Farlar	ABS Plastik
Batarya	VRLA Akü - LiFePO4
Işık Kaynağı	LED 6500K
Işık Gücü	2x800lm Power Led
Çalışma Voltajı	230V AC 50/60Hz
Test	Manuel Test Butonu
Şarj Süresi	24 Saat
Koruma Sınıfı	IP40
Elektrik Sınıfı	Class I
Montaj	Sıva Üstü – Portatif
Çalışma Sıcaklığı	-5°C / +45°C
Renk	Siyah
Standartlar	EN 60598-1, EN 60598-2-22, EN 60598-1/A1, IEC 61547:2020

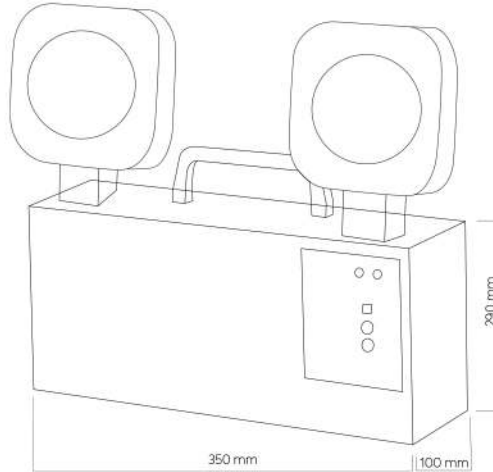

MODEL KOD	WATT EŞDEĞERİ	YANMA SÜRESİ	BOYUTLAR (MM)	AĞIRLIK
SFPOWER 2700-2	2 x 15W	180 dakika	350x290x100 mm	4100 gr
SFPOWER 2700-1	2 x 15W	60 dakika	350x290x100 mm	3700 gr

Feature	Value / Description
Body	Metal Housing
Lamps	ABS Plastic
Battery	VRLA Akü - LiFePO4
Light Source	LED 6500K
Light Power	2x800lm Power Led
Operating Voltage	230V AC 50/60Hz
Test	Manual Test Button
Charging Time	24 Hours
Protection Class	IP40
Electrical Class	Class I
Installation	Surface Mounted – Portable
Operating Temperature	-5°C / +45°C
Color	Black
Standards	EN 60598-1, EN 60598-2-22, EN 60598-1/A1, IEC 61547:2020

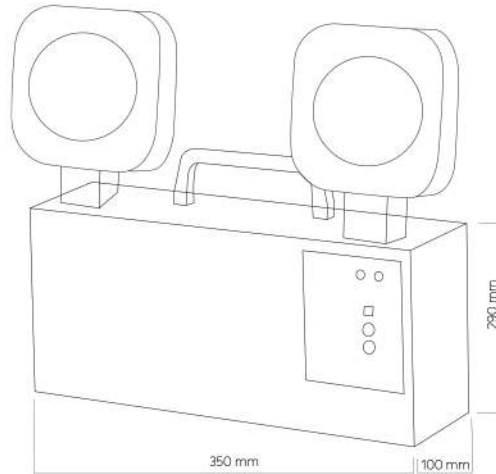

MODEL CODE	WATT POWER	DURATION	DIMENSIONS (MM)	WEIGHT
SFPOWER 2700-2	2 x 15W	180 min	350x290x100 mm	4100 gr
SFPOWER 2700-1	2 x 15W	60 min	350x290x100 mm	3700 gr